

Tehnički list za artikl: NLWERE29EL

Svjet.design WAF ERT-LED EL 1x1W

230VAC/DC kao inox u zid

Wall recessed mounting, with supervision - centrally switchable, stainless steel look, recessed mounting with adapter frame in switch box Ø68mm, 140lm



Tehnički podaci

Neto širina (mm)	90,00
Neto visina (mm)	90,00
Neto dubina (mm)	21,00
Neto masa (kg)	0,18
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	WER
Boja	Inox - optika
Rasvjetno tijelo	ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,70
Power max. (W)	2,10
IP stupanj zaštite	IP20
Udarna čvrstoća	≥ IK03
Način montaže	Zidna ugradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak


AA klase E 8101

AA4


Proizvođač

Schrack


Dimensions (mm)

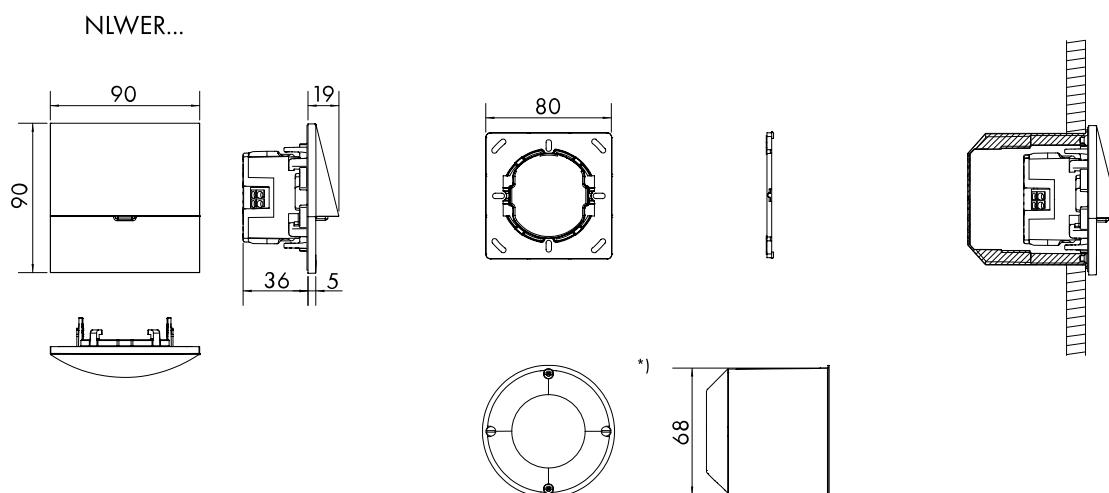

Dimensions (mm)

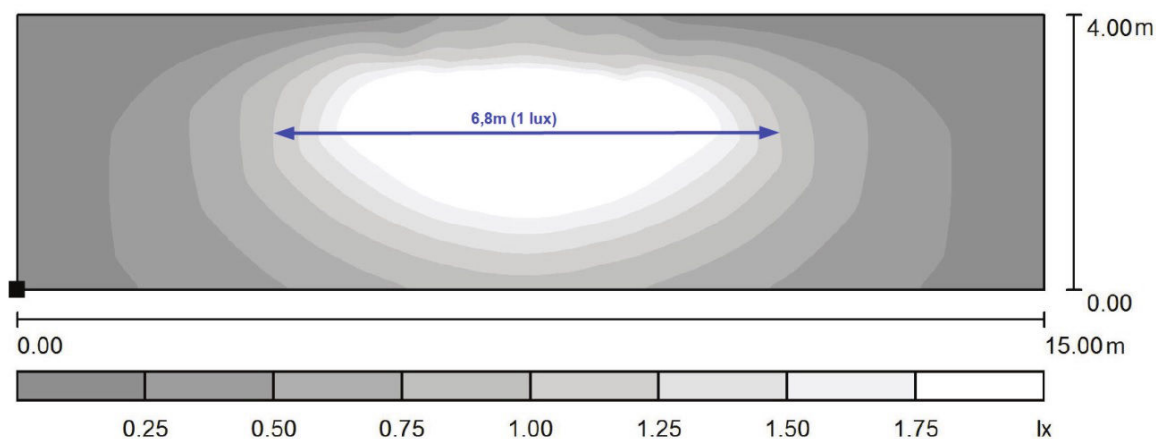

Dimensions (mm)

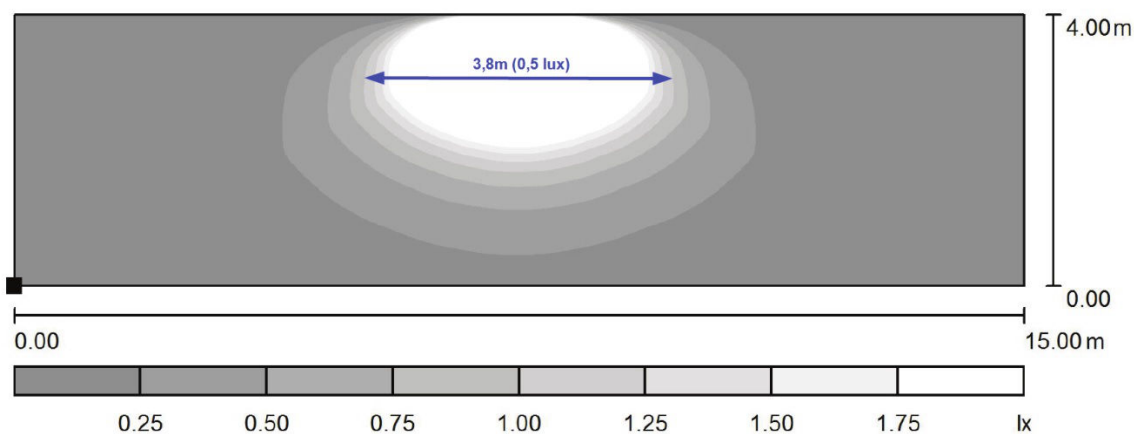

Svjet.design WAF ERT-LED EL 1x1 W 230VAC/DC kao inox u zid

Wall recessed mounting, with supervision - centrally switchable, stainless steel look, recessed mounting with adapter frame in switch NLWERE29EL
box Ø68mm, 140lm