

Tehnički list za artikl: NLZAA003WL

Panik svjetiljka ZAA Wireless LED 3h 230VAC, zidna mont.

Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	antracit
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	170
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP65
Udarna čvrstoća	IK08


Tehnički podaci - nastavak

Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

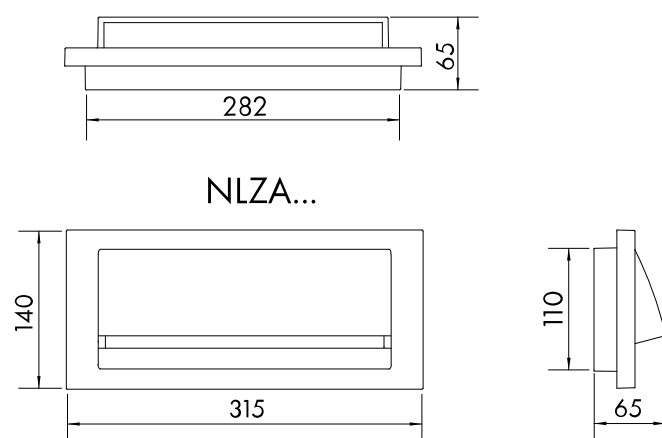

Drilling distances (mm)

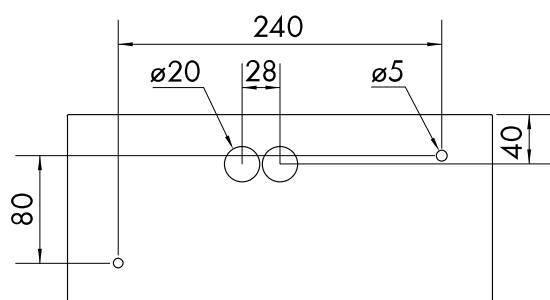

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka ZAA Wireless LED 3h 230VAC, zidna mont. Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type	NLZAA003WL
Dodatni pribor	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW Za serije KM, KSC, KMB, ASM, ZAW, NLIL. L.23., LiFePO4 - Litij-željezna fosfatna baterija , UN3480 - UN 3480 : Litij-ionske baterije, kompatibilne s akumulatorom 3,2V 3,3Ah	NLAKKU3230