

Tehnički list za artikl: NLZAA509CC

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	RAL 7016 (antracit)
Rasvjetno tijelo	LED (2W)
Lumen	220
Područje napona (V)	24V AC


Tehnički podaci - nastavak

Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP stupanj zaštite	IP65
Udarna čvrstoća	IK08
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

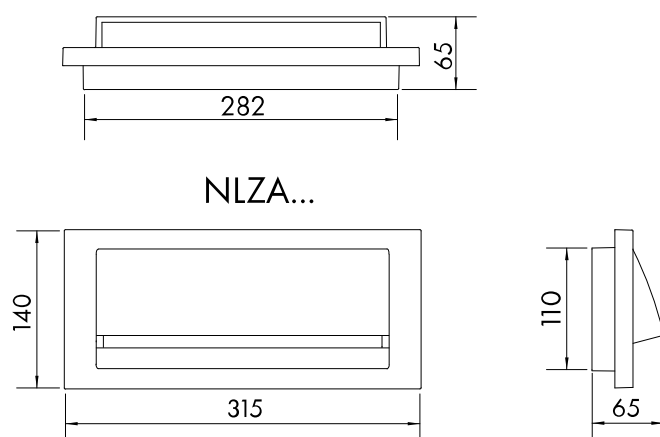

Bohrabstände (mm)

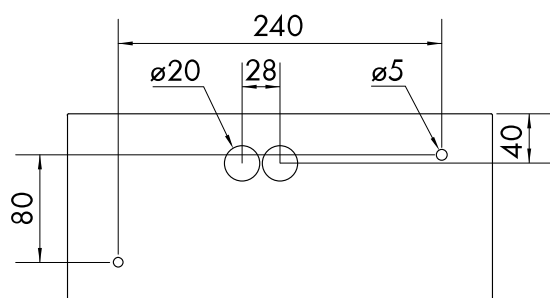

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	0,27	3,3	0,59	9,77	4,07
2,50	0,2	3,51	0,58	10,94	4,42
3,00	0,19	3,66	0,58	11,91	4,27
3,50	0,15	3,74	0,56	12,73	3,16
4,00	0,09	3,72	0,55	11,96	2,82

OPIS

KAT. BROJ

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

NLZAA509CC

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm