

Tehnički list za artikl: NLZAAC03SC

Panik svjetiljka ZAA Wireless LED 3h/ 8h 230VAC, zidna mont.

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting



Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	antracit
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	1h: 170;3h: 170;8h: 76
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP65
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

AA klase E 8101

AA3


AA4

AA5


Proizvođač

Schrack


Dimensions (mm)

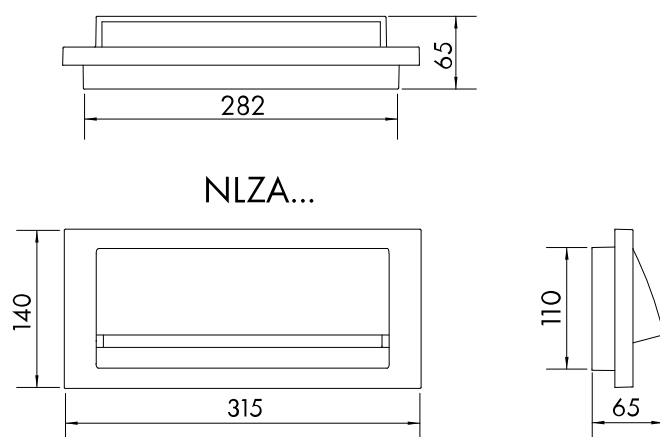

Drilling distances (mm)

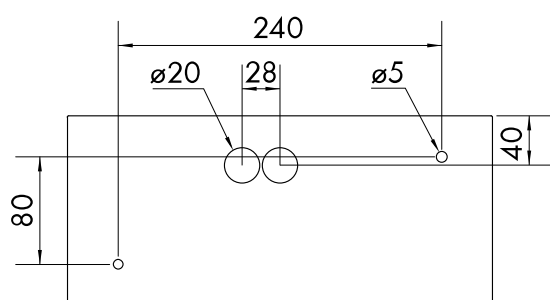

Housing IP54 for COOL-version (mm)

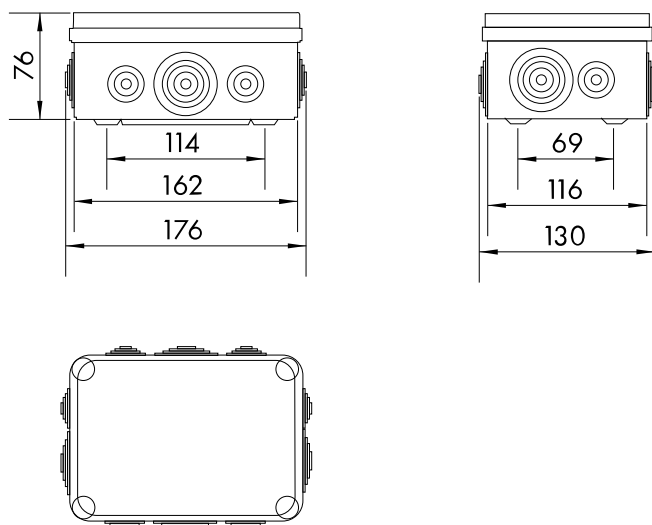

Podatkovna tablica: Panik svjetiljka ZAA Wireless LED 3h/8h 230VAC, zidna mont.

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka ZAA Wireless LED 3h/8h 230VAC, zidna mont. Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting	NLZAAC03SC
Dodatni pribor	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW Za serije KM, KSC, KMB, ASM, ZAW, NLIL. L.23., LiFePO4 - Litij-željezna fosfatna baterija , UN3480 - UN 3480 : Litij-ionske baterije, kompatibilne s akumulatorom 3,2V 3,3Ah	NLAKKU3230