

Tehnički list za artikl: NLZAAC03WL

# Panik svjetiljka ZAA Wireless LED 3h 230VAC zidna montaža

metalno kućište, boja antracit, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu izvan rashladnog prostora, centralno uključivanje i isključivanje



## Tehnički podaci

|                                |                                 |
|--------------------------------|---------------------------------|
| Neto duljina (mm)              | 315,00                          |
| Neto visina (mm)               | 140,00                          |
| Neto dubina (mm)               | 65,00                           |
| Neto masa (kg)                 | 2,20                            |
| Vrsta svjetiljke               | Sigurnosna svjetiljka           |
| VB-CPS                         | Sa vlastitom baterijom          |
| Funkcija                       | WirelessControl Low Temperature |
| Izvedba/tip                    | Metalna zaštita od udara        |
| Dizajn                         | ZA                              |
| Boja                           | antracit                        |
| Vrijeme autonomije (h)         | 3                               |
| Rasvjetno tijelo               | LED (2W)                        |
| Lumen                          | 170                             |
| Područje napona (V)            | 230V AC 50Hz ±20%               |
| Baterija (V/Ah)                | 3,2/3,0 LiFePO4                 |
| IP stupanj zaštite             | IP65                            |
| Način montaže                  | Zidna nadgradna                 |
| Min. temperatura okoline (°C)  | -25                             |
| Maks. temperatura okoline (°C) | 40                              |

## Tehnički podaci - nastavak

AA klase E 8101

AA3


AA4

AA5


Proizvođač

Schrack

## Dimensions (mm)

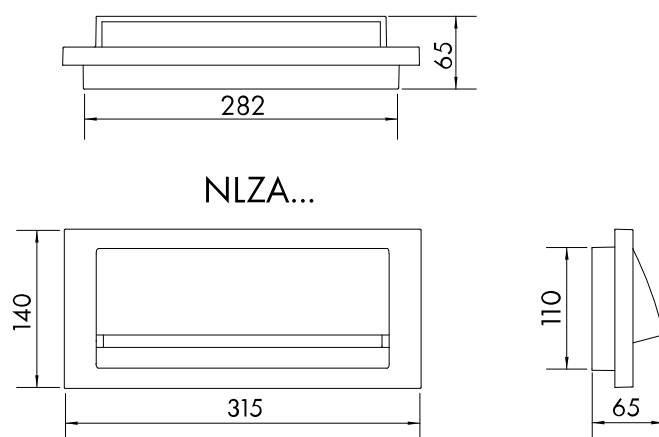

## Drilling distances (mm)

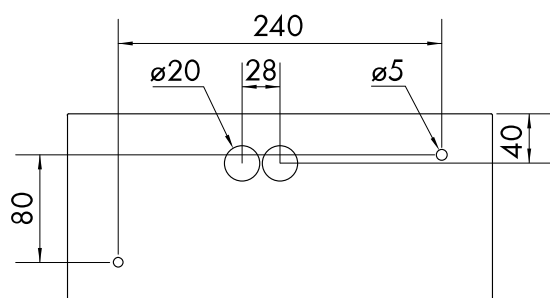

## Housing IP54 for COOL-version (mm)



## Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

| Montagehöhe [m] |  |  |  |  |  |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 2,00            | 0,00                                                                                | 3,03                                                                                | 5,33                                                                                | 10,38                                                                                 | 4,29                                                                                  |
| 2,50            | 0,00                                                                                | 3,20                                                                                | 5,88                                                                                | 11,66                                                                                 | 4,70                                                                                  |
| 3,00            | 0,00                                                                                | 3,29                                                                                | 6,16                                                                                | 12,75                                                                                 | 4,80                                                                                  |
| 3,50            | 0,00                                                                                | 3,27                                                                                | 4,21                                                                                | 12,99                                                                                 | 2,73                                                                                  |
| 4,00            | 0,00                                                                                | 3,29                                                                                | 2,77                                                                                | 11,96                                                                                 | 0,00                                                                                  |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                              | KAT. BROJ  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Panik svjetiljka ZAA Wireless LED 3h 230VAC zidna montaža<br>metalno kućište, boja antracit, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu<br>izvan rashladnog prostora, centralno uključivanje i isključivanje | NLZAAC03WL |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                             |            |
| Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW<br>Za serije KM, KSC, KMB, ASM, ZAW, NLIL. L.23., LiFePO4 - Litij-željezna fosfatna baterija , UN3480 - UN 3480 : Litij-ionske<br>baterije, kompatibilne s akumulatorom 3,2V 3,3Ah                       | NLAKKU3230 |