

Tehnički list za artikl: NLZAWC03WL

Panik svjetiljka ZAW Wireless LED 3h 230VAC, zidna mont.

metalno kućište, boja bijela, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu izvan rashladnog prostora, centralno uključivanje i isključivanje



Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	bijela
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	170
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP65
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

AA klase E 8101

AA3


AA4

AA5


Proizvođač

Schrack


Dimensions (mm)

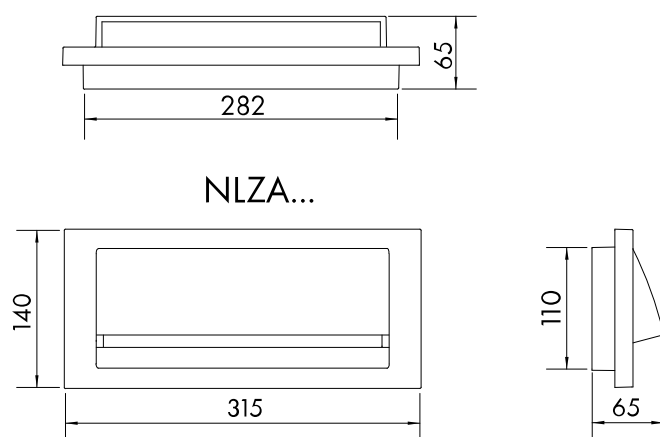

Drilling distances (mm)

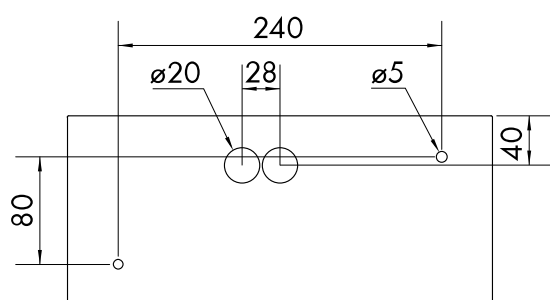

Housing IP54 for COOL-version (mm)

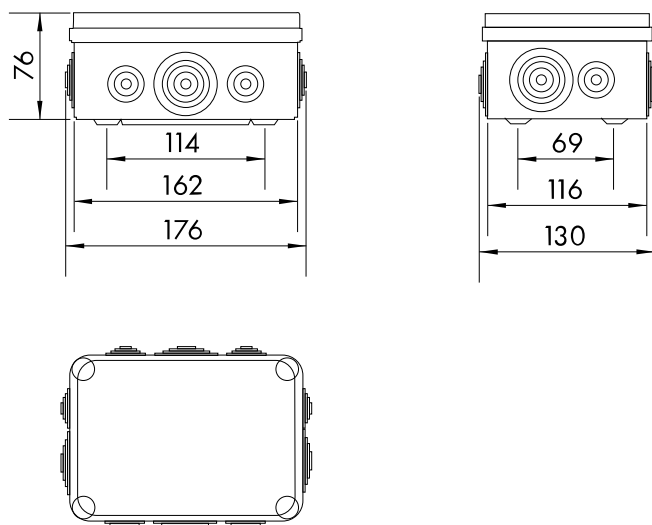

Podatkovna tablica: Panik svjetiljka ZAW Wireless LED 3h 230VAC, zidna mont.

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka ZAW Wireless LED 3h 230VAC, zidna mont. metalno kućište, boja bijela, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom, baterije u posebnoj kutiji za montažu izvan rashladnog prostora, centralno uključivanje i isključivanje	NLZAWC03WL
Dodatni pribor	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW Za serije KM, KSC, KMB, ASM, ZAW, NLIL. L.23., LiFePO4 - Litij-željezna fosfatna baterija , UN3480 - UN 3480 : Litij-ionske baterije, kompatibilne s akumulatorom 3,2V 3,3Ah	NLAKKU3230