


Tehnički list za artikl: NLZAWT03WL

Sigurnosna svjetiljka ZA WL LED 3h 230V AC zidna montaža

Lijevani cink, bijeli, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom prikladnom za niske temperature, zidna montaža, radio prebacivanje




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	bijela
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	190


Tehnički podaci - nastavak

Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	IK08
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

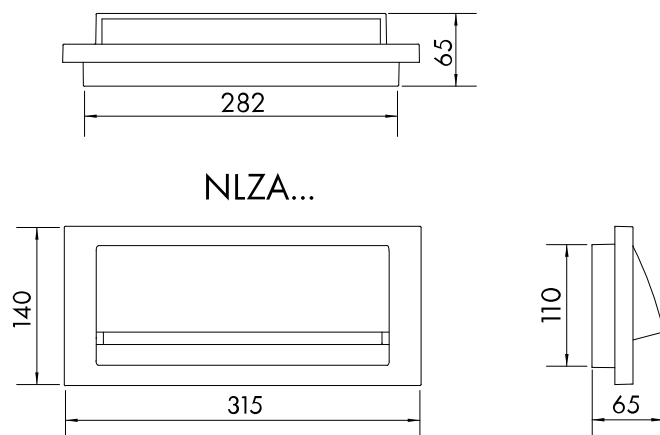

Drilling distances (mm)

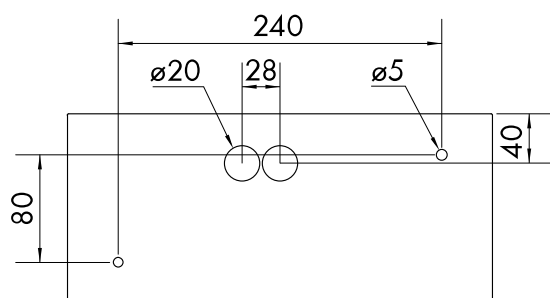

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	KAT. BROJ
Sigurnosna svjetiljka ZA WL LED 3h 230V AC zidna montaža Lijevani cink, bijeli, IP65, -25° do 40°C, 4 x HP LED 0,5W, s LiFePO4 baterijom prikladnom za niske temperature, zidna montaža, NLZAWT03WL radio prebacivanje	
Dodatni pribor	
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T