


Tehnički list za artikl: RXT11T30--

Uski industrijski relej 1 C/O, 230VAC, 10A, LED

S-Relay, RXT series, with latching slider




Tehnički podaci

Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	55
Kontakti	1 preklopni
Nazivna struja kontakata (A)	10
AC svitak (VAC)	230
Nazivna struja [Omski teret] (A)	10
Nazivni napon [Omski teret]	250VAC / 30VDC
Snaga sklapanja [Omski teret]	3000VA / 360W
Materijal kontakata	Srebrna legura
Početni kontaktni otpor (Ohm)	≤ 50mΩ
Električna izdržljivost (radni ciklus)	≥ 10 ⁵ sklapanja (1800 sklapanja/h)
Mehanički životni vijek	≥ 10 ⁷ operacija (18000 operacija/h)
Napon privlačenja (uklopa) AC (V)	≤ 80% (nazivni napon)
Napon ispada AC	≥ 30% (nazivnog napona)
Maksimalan napon (V)	110% (Rated voltage)
Izolacijski otpor (MΩ*km)	≥ 1000MΩ (500VDC)
Vlastita potrošnja svitka [AC] (VA)	~ 1VA


Tehnički podaci - nastavak

Vrijeme rada [na nazivnom naponu] (ms)	≤ 20ms
Vrijeme ispada (pri nazivnom naponu) (ms)	≤ 10ms
Početna dielektrična čvrstoća	-
Između otvorenih kontakata	1000VAC/1 min
Između polova	2000VAC/1 min
Između kontakata i svitka	2000VAC/1 min
Vlažnost zraka (%)	35% - 85% RH
Tlak zraka	86 - 106kPa
Otpornost na udar	10G
Otpornost na vibracije	10 - 55Hz
Neto masa (kg)	0,02
Disipacija snage (W)	0,50


Sheme: Uski industrijski relej 1 C/O, 230VAC, 10A, LED

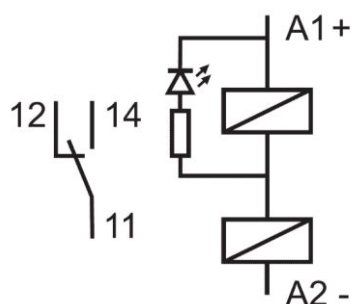

Mjerne skice: Uski industrijski relej 1 C/O, 230VAC, 10A, LED

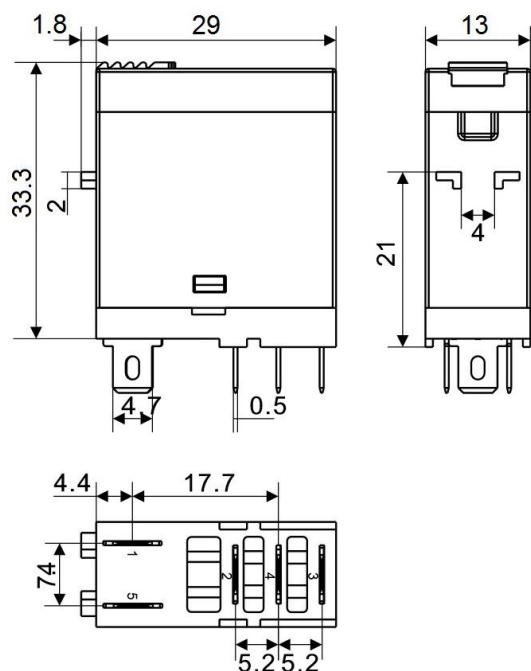

Elektrische Lebensdauer der Kontakte 1) ohmsche Last 2) induktive Last

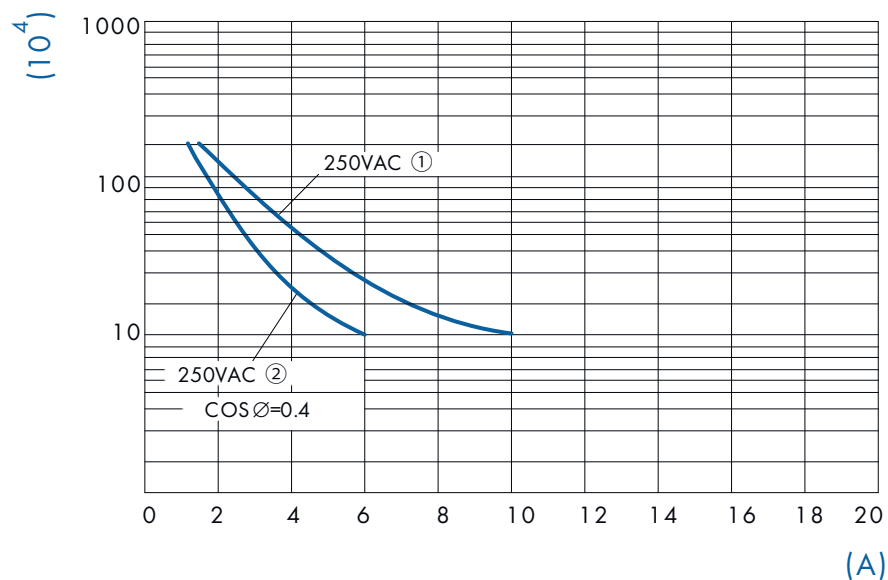

Maximales Schaltvermögen 1) ohmsche Last

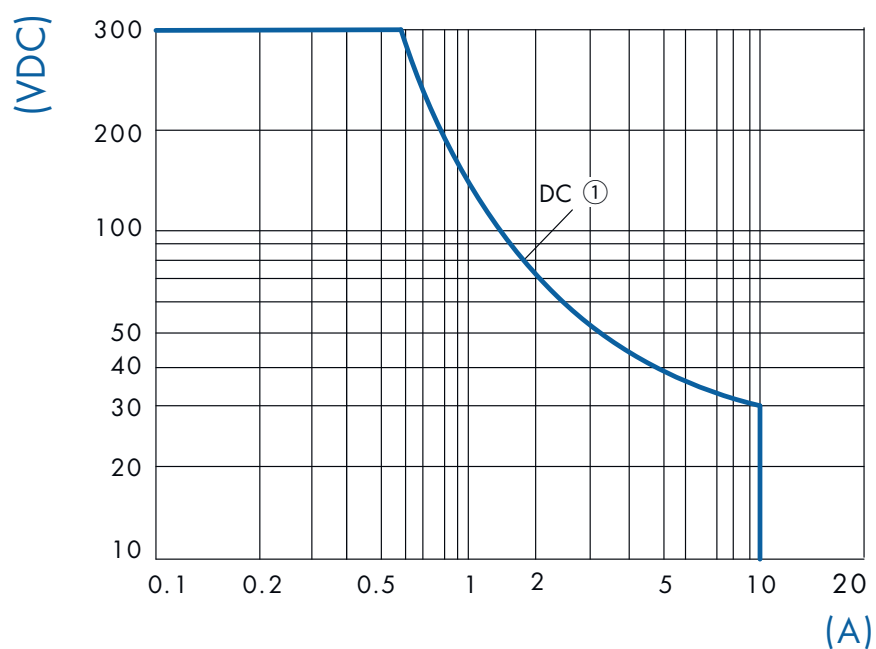


Tabela artikla

OPIS	KAT. BROJ
Uski industrijski relej 1 C/O, 230VAC, 10A, LED S-Relay, RXT series, with latching slider	RXT11T30
Dodatni pribor	
Podnožje za 1P RXT releje, vijčano S-Relay, RXT series	YRXT1010
Podnožje za 1P RXT releje, utično For Push in wiring. S-Relay, RXT series	YRXT1110