

Tehnički list za artikl: WST1212402

Zidni ormar, metalni, 2 vrata, IP54, 1200x1200x400 (VxŠxD)

Čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x prirubnica 505x119mm (ŠxD)



SCHRACK info

- Material: Solid, cross-shaped construction, which is folded and welded from a cold-pressed sheet steel plate regardless of the size of the enclosure.
- The enclosure consists of two parts: Body and door.
- Gland plates: 1.4mm powder coated sheet steel. The body front of the enclosure is a double-edged rain gutter to allow water to drain. The enclosure can be rotated by 180°, so the cable entry is possible via gland plate openings in the base or at the top. 4 wall mounting holes with 8.5mm diameter arranged in the corners of the rear wall. All mounting holes have 20mm edge distance. All parts are pre-treated with iron phosphate, demineralised and protected by an epoxy-polyester powder-structure coating in RAL7035.
- The door is secured by hinges and has an opening angle of 130°. The door is mounted using safety pins and the hinges are hidden. The door hinge can be changed easily from right to left. The doors have a foamed polyurethane seal.
- Mounting plate: Galvanised sheet steel, 2mm, folded on all sides. The mounting plate folded on all sides is mounted on welded M8 bolts on the rear of the enclosure and can be removed for mounting and wiring. The mounting plate is made of 2mm sendzimir galvanized sheet steel to comply with EMC guidelines. It has earthing points to establish a connection to the enclosure body.
- Protection class: Maximum protection for the devices is guaranteed due to the high degree of protection and impact resistance IK10 according to IEC 60529 standards. Corrosion protection for additional drilling should be considered.

- Mounting: The enclosure is mounted to the wall with screws (with plastic washers inside) directly with the rear wall or with a mounting kit (accessory WSTWB004 / WSTWB006), in both cases the IP degree of protection is maintained. The small opening radius of the doors makes it easy to mount enclosures directly next to each other.
- Delivery includes: Complete enclosure with gasket and screws, keys DIN 5mm and mounting plate incl. mounting material. Grounding possibilities are given.



Tehnički podaci

Neto širina (mm)	1.200,00
Neto visina (mm)	1.200,00
Neto dubina (mm)	400,00
Neto masa (kg)	91,41
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Tip	Zidni ormar, čelični lim
Visina (mm)	1200
Širina (mm)	1200
Dubina (mm)	400
Maksimalna opteretivost (kg)	235
Debljina zidova kućišta (mm)	1,50
IP stupanj zaštite	IP54
Montažne ploče	Galvanizirani čelik 2mm
Opteretivost montažne ploče (kg)	190
Debljina stijenke montažne ploče (mm)	2
Montažna ploča - visina (mm)	1140
Montažna ploča - širina (mm)	1140
Broj vrata	2
Opteretivost vrata (kg)	30
Broj prirubnica	2
Debljina stijenke vrata (mm)	2
Vrata - ojačanje	Inkl.
Brava	Zakretna ručica
Šarka	6
Tip prirubnice	F
Širina prirubnice (mm)	505
Dubina prirubnice (mm)	119
Stražnja zidna montaža	6
Boja	RAL 7035 (svijetlo siva)
Disipacija snage (W)	-684,00
Klasa zaštite	I

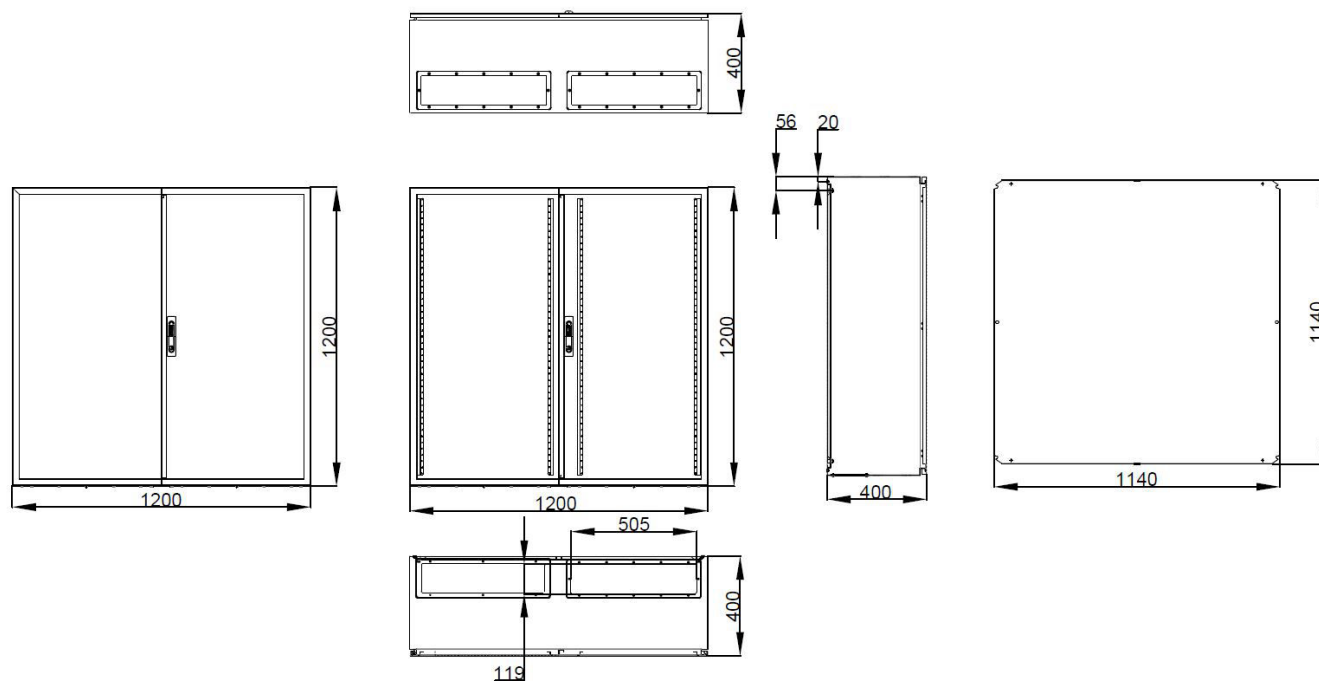
Mjerni crtež

Tabela artikla

OPIS	KAT. BROJ
Zidni ormar, metalni, 2 vrata, IP54, 1200x1200x400 (VxŠxD)	
Čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x prirubnica 505x119mm (ŠxD)	WST1212402
Dodatni pribor	
Zidni nosači za WST ormare visine od 1000mm, pocinčani	WSTWB006
Pakiranje 6 komada	
Bakreni vodič za uzemljenje (pletunica) duljine 260mm	WSTCUF260
Mini zakretna ručica sa tipkom za WST	WSTS3531
odgovara za: WST1206300, WST1208300, WST1208400, WST1210302, WST1212302, WST1212402, WST1410302	
Zakretna ručica za polucilindar 40mm, IP65	IU001225
s pokrovom za polucilindar bravu, crna	
Zakretna ručica za polucilindar 45mm, IP65	IU001226
s pokrovom za polucilindar bravu, crna	
Zakretna ručica 1125-U 186 za polucilindar 40mm, IP40	IU001903
Ventilacijska prirubnica za WST ormare, 505x119mm (ŠxD)	WSTVF003
prirubnica tip F	
Prirubnica za uvodnice WST sa 27xM16, 5xM20, 4xM25, 2xM32	
Prirubnica za WST ormare, s otvorima: 27xM16, 5xM20, 4xM25, 2xM32, 505x119mm (ŠxD), poklopci za sve otvore sadržani u WSTFA0F1	
isporuci, RAL 7035	
Prirubnica za uvodnice WST sa 18xM16, 14xM20, 3xM25, 1xM32	
Prirubnica za WST ormare, s otvorima: 18xM16, 14xM20, 3xM25, 1xM32, 505x119mm (ŠxD), poklopci za sve otvore sadržani u WSTFA0F2	
isporuci, RAL 7035	
Prirubnica za povezivanje WST ormara, 505x119mm (ŠxD)	WSTVBF04
RAL7035	
Kabelska uvodnica Ø28mm - 6 kabelskih uvoda	WSTCEG2806
kabelski uvodi: 3x 3-4mm i 3x 5-9mm	
Kabelska uvodnica Ø40mm - 10 kabelskih uvoda	WSTCEG4010
kabelski uvodi: 3x 5,5-14mm i 7x 2,5-7mm	
Kabelska uvodnica Ø50mm - 8 kabelskih uvoda	WSTCEG5008
kabelski uvodi: 2x 3-7mm, 1x 12-21mm, 1x 7-15mm, 4x 4-10mm	
Kabelska uvodnica Ø50mm - 7 kabelskih uvoda	WSTCEG5007
kabelski uvodi: 7x 8-12mm	