


Tehnički list za artikl: EV103004--

Umetak dimera, 400 W/VA, RC, 2-žični

Cover EV102013--

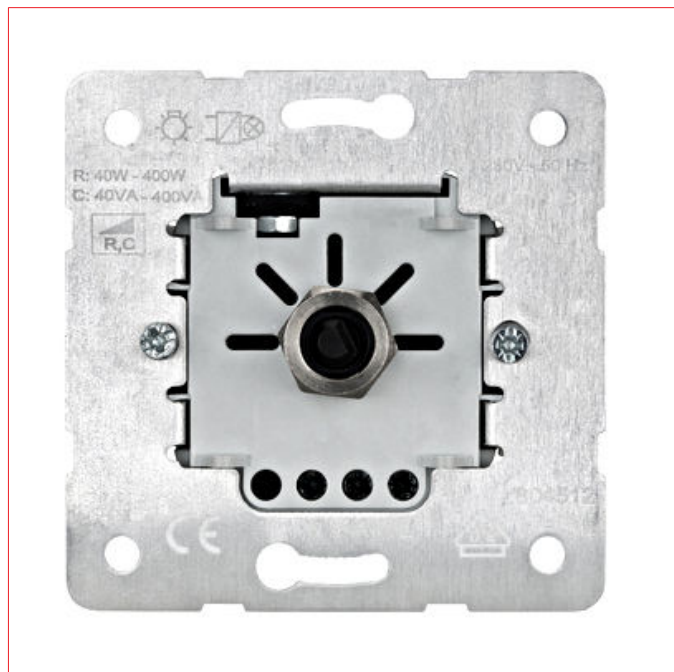

Schrack-Info

Phase cut rotary dimmer with on/off button for resistive or inductive loads. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Tip proizvoda	Dimer
Tip dimera	Leading edge dimer
Vrsta otpora	Omski Kapacitivni
Dimabilna rasvjetna tijela	Niskonaponska halogena žarulja sa elektronskim napajanjem Žarulja Visokonaponska halogena svjetiljka
Raspon snage	40-400 W/VA
Radni napon AC (V)	230
Način ugradnje	Screws and claws
Način pričvršćenja	Podžbukni

Tehnički podaci - nastavak


Radna temperatura	0°C bis +35°C
Zaštita	Electronic short-circuit protection Reversible electronic overload protection
IP stupanj zaštite	IP20
Tip priključka	Vijčana stezaljka
Priključne stezaljke	prema EN 60669-1
Dopušteni kabeli	Kruti Fleksibilni sa tuljcima Fleksibilni
Dopušteni presjek (mm ²)	1,5 und 2,5
Materijal	ABS Pocinčani čelik
Okoliš	bezhalogeno
Trajnost	ROHS
Ispitni znak	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35

Dimmleistung

							
Min.	40 W	40 W	-	40 VA	-	-	-
Max.	400 W	400 W	-	400 VA	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

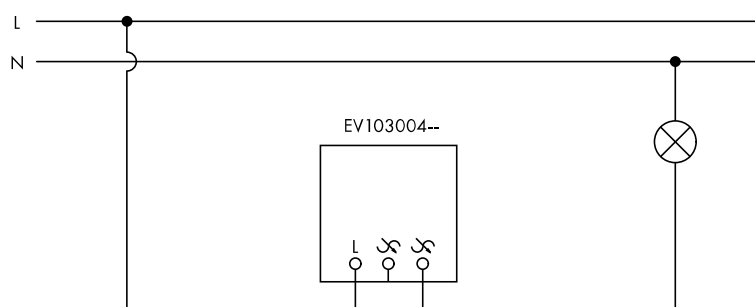

Abmessungen (mm)

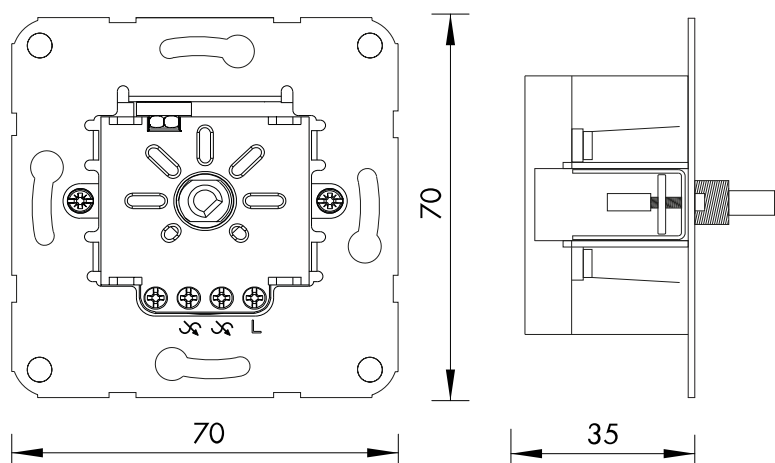


Tabela artikla

OPIS	KAT. BROJ
Umetak dimera, 400 W/VA, RC, 2-žični Cover EV102013--	EV103004