

Tehnički list za artikl: NLKMBS403B

Emergency luminaire KMB WirelessConnect LED 3h 230V AC, black

Universal mounting, with LiFePO₄ battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	50,00
Neto masa (kg)	0,29
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect
Izvedba/tip	Plastične svjetiljke
Dizajn	KMB
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)

Tehnički podaci - nastavak




Lumen	190
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,3 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Mjerne skice: Emergency luminaire KMB WirelessConnect LED 3h 230V AC, black

NLKMB...

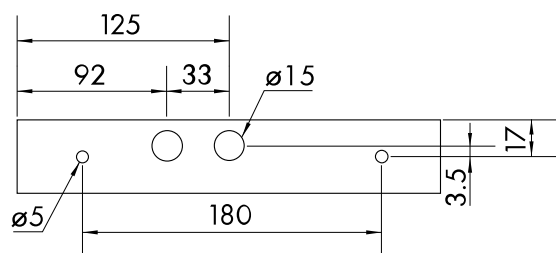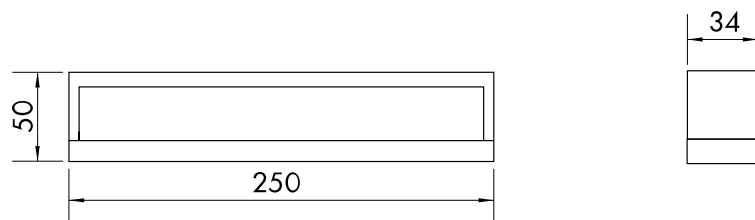

NLKME

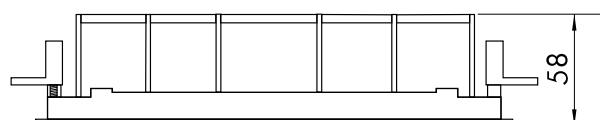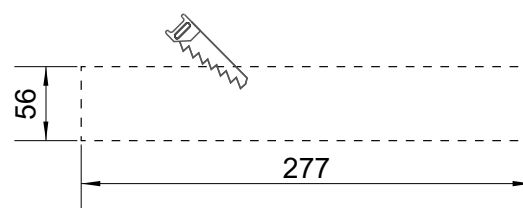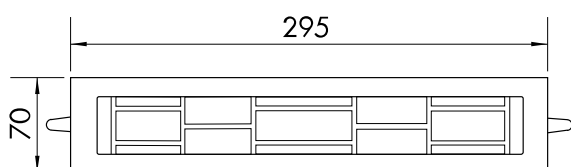

Podatkovna tablica: Emergency luminaire KMB WirelessConnect LED 3h 230V AC, black

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KMB WirelessConnect LED 3h 230V AC,black Universal mounting, with LiFePO4 battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm	NLKMBS403B
Dodatni pribor	
Ugradni okvir za KM i KS, crni, samo za svjetiljke bez bat. Required ceiling cut out: 277 x 56 mm	NLKMES
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4