

Tehnički list za artikl: NLZAAC03WB

Sigurnosna svjet. ZA HP-LED 4x0,5W 3h 230V AC Bluetooth

Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire, with Bluetooth communication




Tehnički podaci

Neto duljina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto masa (kg)	2,20
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect Low Temperature
Izvedba/tip	Metalna zaštita od udara
Dizajn	ZA
Boja	antracit
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	170


Tehnički podaci - nastavak

Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	3,2/3,3 LiFePO4
IP stupanj zaštite	IP65
Udarna čvrstoća	IK08
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

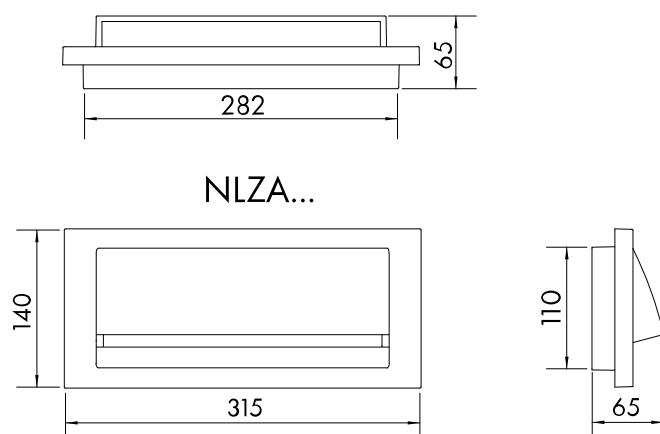

Bohrabstände (mm)

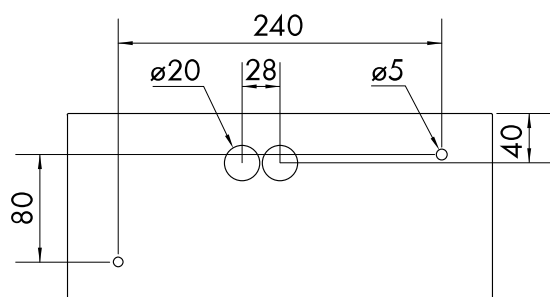

Gehäuse IP54 für COOL-Ausführung (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 -8h Autonomiezeit

Montagehöhe [m]					
2,00	0,00	3,03	5,33	10,38	4,29
2,50	0,00	3,20	5,88	11,66	4,70
3,00	0,00	3,29	6,16	12,75	4,80
3,50	0,00	3,27	4,21	12,99	2,73
4,00	0,00	3,29	2,77	11,96	0,00

Tabela artikla

OPIS	KAT. BROJ
Sigurnosna svjet. ZA HP-LED 4x0,5W 3h 230V AC Bluetooth	
Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire, NLZAAC03WB with Bluetooth communication	
Dodatni pribor	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW	
LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230